



## RUGGED MPM12 DISPLAY

### Military-Grade Rugged Display

The **Rugged MPM12** is a rugged 12-inch military-grade display engineered for reliable operation in airborne, ground, and maritime environments. Built with a lightweight aluminum chassis, optically bonded anti-reflective glass, and shock-mounted construction, it delivers dependable performance in demanding defense, aerospace, and industrial applications. Its compact 5U form factor is ideal for mission-critical deployments where durability and reliability are essential.

Featuring a high-brightness 1280 × 800 LCD with up to 1000 nits of luminance, the MPM12 provides excellent visibility in challenging lighting conditions. Configurable video inputs, touchscreen capability, and multiple interface options offer flexibility across a wide range of platforms, while its passive cooling design ensures reliable performance in harsh environments.

- Application-specific design
- Tested to meet military standards
- Built in the USA

Copyright 2026 All Rights Reserved

### Featured Specifications

#### Dimensions

Height: 7.50" | Depth: 2.34" | Width: 12.00"

#### Display

12" LCD with a full OSD

#### Resolution


1280 × 800

#### Display Input

RGB/DVI/HDMI/HD-SDI/S-Video  
Composite (Configurable)

#### Power

Power options available

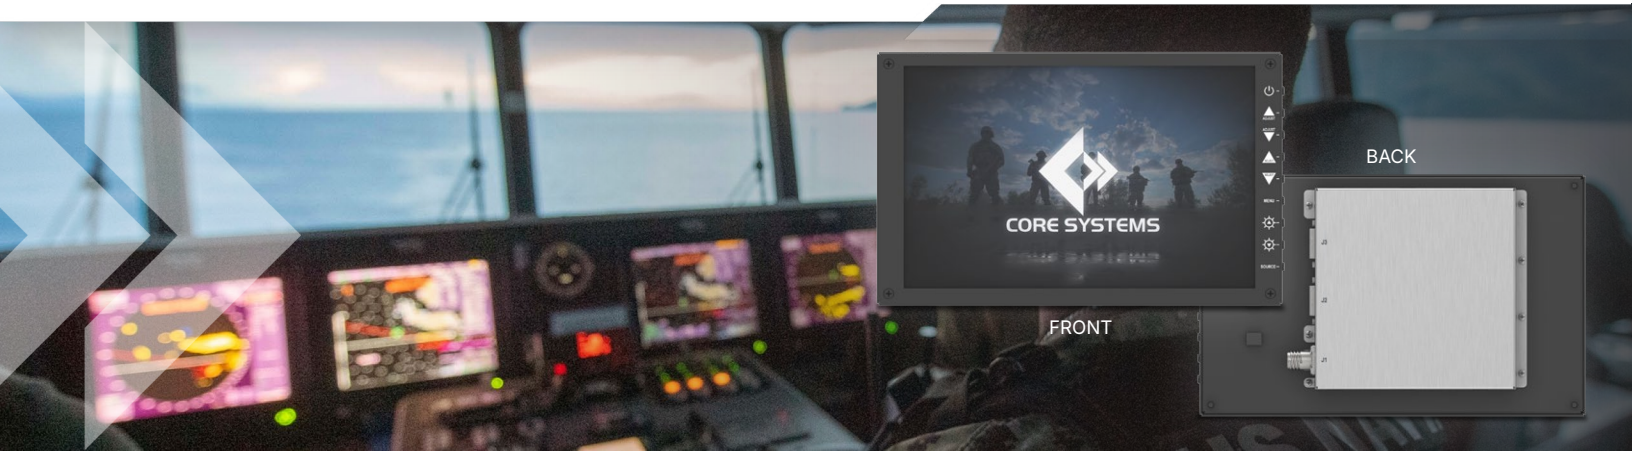

## Technical Specifications

### Dimensions

Height: 7.50 inches, Width: 12.00 inches, Depth: 2.34 inches  
Weight: 4.00 lbs

### Display

12" LCD with a full OSD

### Resolution

1280 × 800

### Display Input

RGB/DVI/HDMI/HD-SDI/S-Video/Composite (Configurable)

### Power

Power options available

### Brightness

1000

### Chassis

Lightweight aluminum chassis

## Environmental Specifications

### Operational Temperature

MIL-STD-810F, Method 501.5, Procedures I/II: -15°C to +55°C

### Storage Temperature

MIL-STD-810F, Method 501.5, Procedures I/II: -15°C to +55°C

### Humidity

MIL-STD-810F, Method 507.4: 95% RH, 48 hours at 40 – 65°C

### Altitude

MIL-STD-810F, Method 500.4: 12,500 ft operation; 40,000 ft transport

### Vibration

MIL-STD-810G, Method 514.6: 4.43 GRMS, 5-20000Hz, 60 min/axis

### Shock

MIL-STD-810G, Method 516.6: 20g, 11ms functional; 40g, 11ms crash hazard

### EMC

MIL-STD-461F: CE & RE emissions

## Work With Core Systems Today

Core Systems designs and builds rugged servers, displays, mission computers, and integrated cabinet solutions for military and industrial applications. From our 85,000 sq. ft. San Diego facility, we deliver cutting-edge, durable computing solutions for mission-critical needs.

### Core Systems

13000 Danielson St  
Poway, CA 92064

